

₩ N

CURB STOP

1 ½" METER .

HOUSE

TWO COURSES OF BRICK

(8 BRICKS EACH COARSE)

SERVICE

BY OTHERS

TYPE K COPPER SERVICE TUBING

MAINTAIN 4' DEPTH TO AVOID

CONFLICT WITH OTHER UTILITIES -

COMPOSITE OPEN BOTTOM METER BOX

QUAZITE FRP MODELS B14243618A AND

C12243603A06B OR APPROVED EQUALS

DITCH

DEPTH AS


18" MIN. COVER AT DITCH

BRASS SADDLE W/ SILICON BRONZE

METER INSTALLATION ELEVATION DETAIL


STRAPS -

AND COVER W/ 2 BOLTS




NOTES:

- 1. SERVICE LINE SHALL BE 1 1/2" FROM THE MAIN TO THE METER.
- 2. USE ALL COMPRESSION GRIP JOINTS.
- INSTALLATION SHALL ALLOW ADEQUATE ROOM TO REMOVE AND/OR REPAIR METER.
- 4. METER BOX SHALL BE APPROXIMATELY 24" x 36" x 18" DEEP.
- TYPE K COPPER SERVICE LINE MUST BE CONTINUOUS FROM METER TO MAIN.
- 6. SERVICE SHALL HAVE 18" MIN. AT METER, AND 30" MIN.COVER BETWEEN MAIN AND METER.

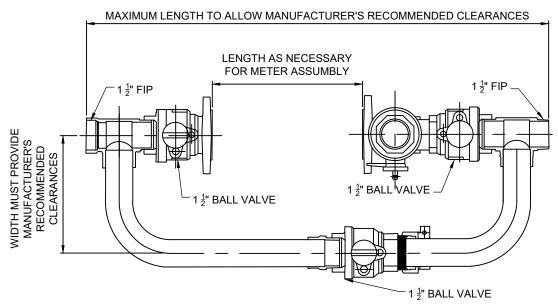

TYPICAL BYPASS DETAIL - PLAN

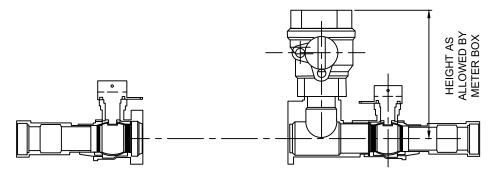

TYPICAL BYPASS DETAIL - ELEVATION N.T.S.

DRAWING NO. **FULTON COUNTY PUBLIC WORKS**

141 PRYOR ST. ATLANTA, GA. 30303 404-612-7400 FAX: 404-224-0498

603