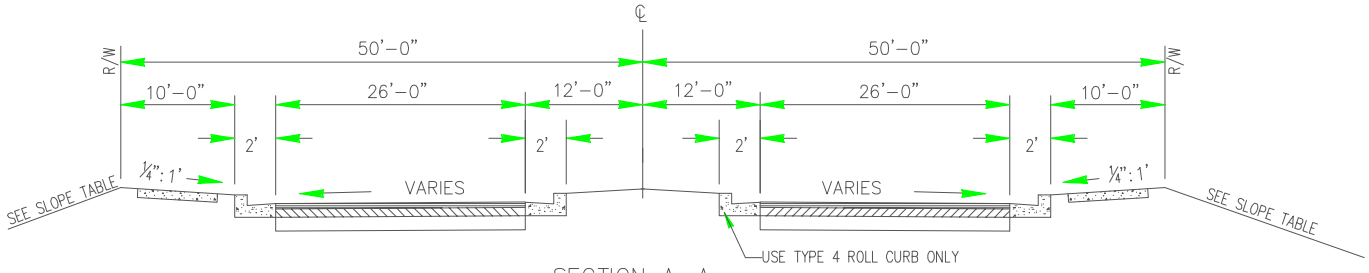

SECTION A–A

RAISED PAVEMENT MARKERS TO BE USED AS REQUIRED AND MUST BE APPROVED BY COUNTY ENGINEER/INSPECTOR

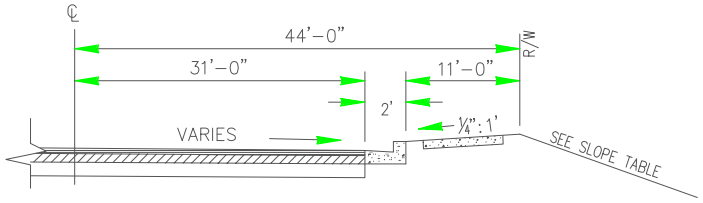

SECTION B–B
(HALF SECTION)

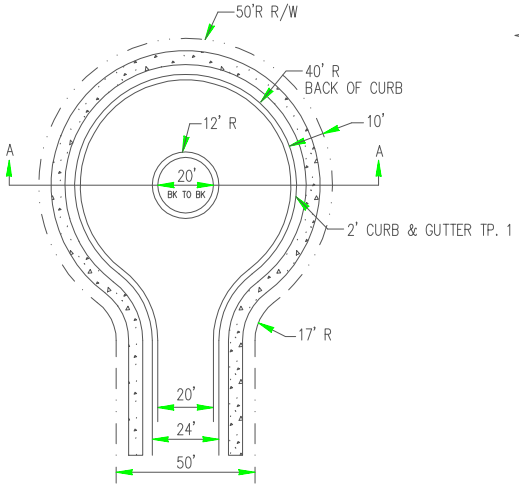

CUL–DE–SAC PLAN
MAJOR SUBDIVISION STREET
N.T.S.

MAJOR SUB. DIV. STREETS & ENTRANCE ROADS

PAVEMENT MATERIAL SCHEDULE
(A) ASPH. CONC. 9.5 mm SUPERPAVE, 165 lb/yd^2 (1-1/2")
(B) ASPH. CONC. 19 mm SUPERPAVE, 220 lb/yd^2 (2")
(C) GRADED AGGREGATE BASE (CRUSHER RUN) 8"

****TACK COAT (CRS2H, SS1 or AC30) TO BE USED AS REQUIRED
****PRIME COAT (RC70) TO BE USED AS REQUIRED

MINOR SUB. DIV. STREETS & SIDE ROADS

PAVEMENT MATERIAL SCHEDULE
(A) ASPH. CONC. 9.5 mm SUPERPAVE, 165 lb/yd^2 (1-1/2")
(B) ASPH. CONC. 19 mm SUPERPAVE, 220 lb/yd^2 (2")
(C) GRADED AGGREGATE BASE (CRUSHER RUN) 6"

****TACK COAT (CRS2H, SS1 or AC30) TO BE USED AS REQUIRED
****PRIME COAT (RC70) TO BE USED AS REQUIRED

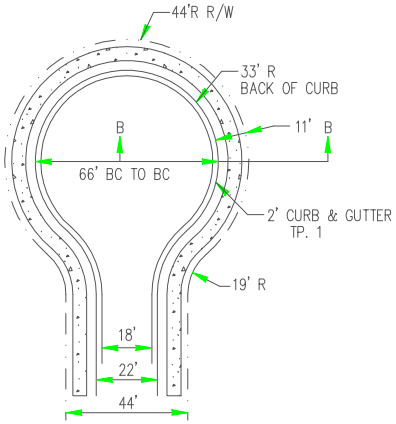

CUL–DE–SAC PLAN
MINOR SUBDIVISION STREET
N.T.S.

SLOPE TABLE

CUT SLOPE		FILL SLOPE	
0'-5'	5' OR MORE	0'-5'	5' OR MORE
4:1	2:1	4:1	2:1

FULTON COUNTY STANDARD DETAIL 303
TYPICAL SECTIONS
CUL–DE–SAC

DATE	REVISIONS	DATE	REVISIONS
6-08	CS		

DGS/DRN/CHKD: KAH
APPROVED: LJM
DATE: 4-19-05

FULTON COUNTY

FULTON COUNTY PUBLIC WORKS
141 PRYOR ST. ATLANTA, GA. 30303
404-612-7400 FAX: 404-730-6325

DRAWING NO.
303